



HP Pavilion dv2913cl WiFi receiver Replacement

This guide will accomplish replacing the WiFi receiver in the HP Pavilion dv2913cl .

Written By: Adam Braga



INTRODUCTION


This guide will accomplish replacing the WiFi receiver in incidents of failure.



TOOLS:


- [JIS Driver Set](#) (1)
-

Step 1 — WiFi receiver

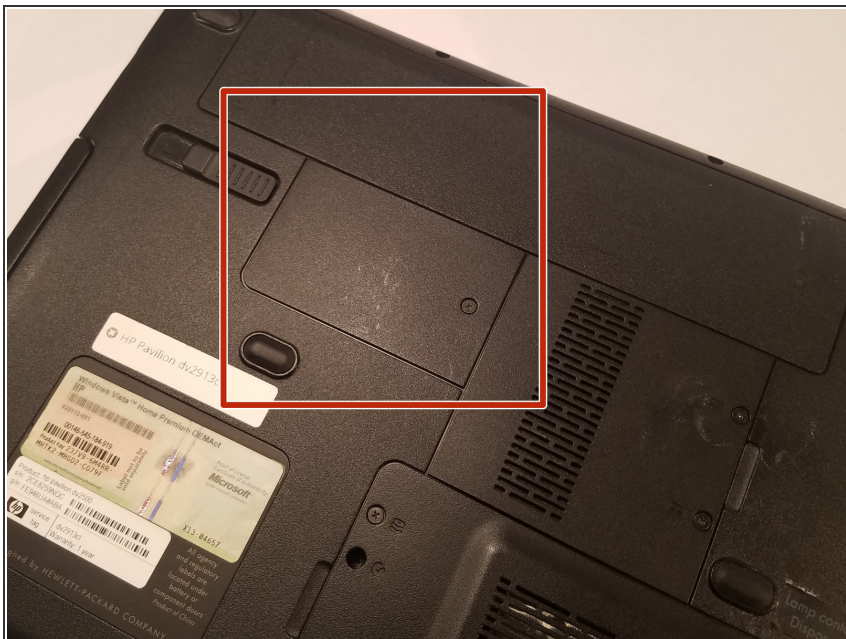

- Begin by locating the smallest panel with one screw attaching it to the laptop computer.

Step 2

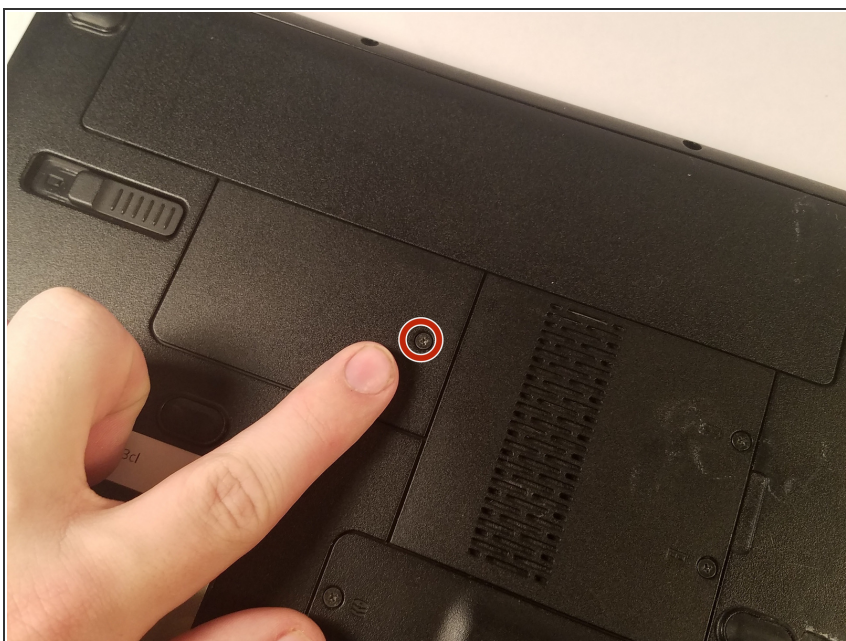



- Remove the one screw holding the panel down, and the WiFi receiver will be revealed.

Step 3



- Remove the two screws that hold down the receiver.
- Gently slide the chip out of the socket.

Step 4

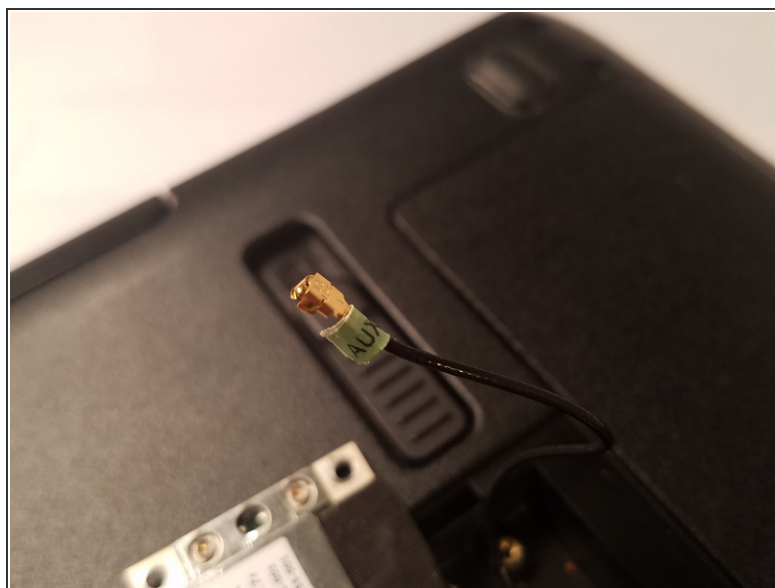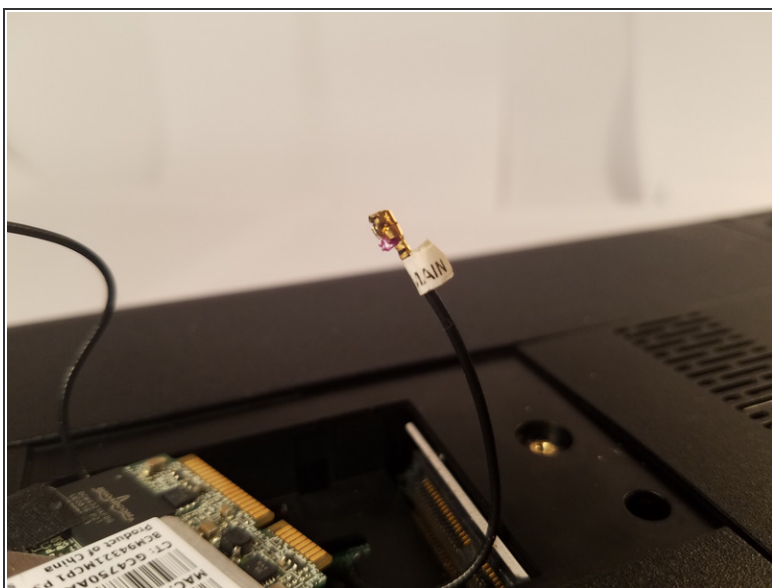

- Remove the two wires labelled AUX and MAIN from the chip.
- Remember where these were attached previously as it is important for proper functionality after the replacement.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 08:13:30 PM.